


IRP1043D10 4U DIN Rail Panel

Included in this package


(1) RCB1112BK Main Panel ◆
and (1) Din Rail.



(12) M4 x 8 Screws




(2) Short Depth 4U Ear Bracket ❖



(4) #10-32 x 5/8 Rack
Screws



(2) PVC Wire Duct◆

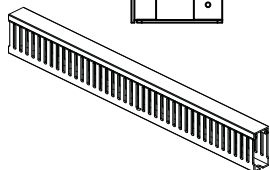

(4) #12-24 x 5/8 Rack
Screws



Installation Steps

Step 1. Place Main Panel ◆ on a flat surface. Place (2) PVC Wire duct ◆ on top with top cover removed.

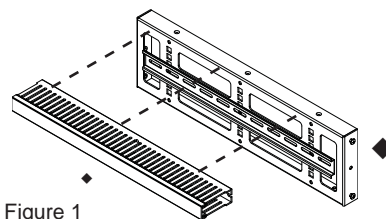


Figure 1

Step 2. Align wire duct's ◆ inside open slots with 3 screw holes on top and bottom edge of Main Panel ◆. Secure them with M4x8 screws. (Figure 1)

Step 3. Place ear bracket ❖ on right and left side of main panel ◆. You can align your main panel ◆ to three screw holes on ear brackets (Figure 2) .

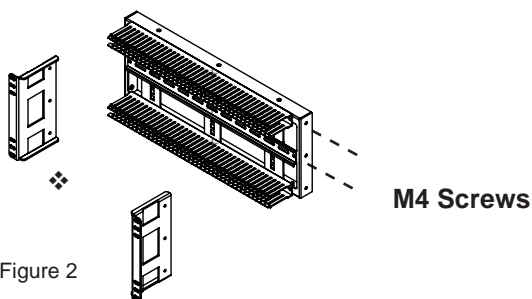


Figure 2

Step 4. Secure both side ear bracket ❖ with (3)M4x8 screw for each side.

Step 5. Readjust Din rail position up or down according to your din rail equipment's space requirement. You will need RSN1035-K1 Cage Nut Kit (Not included) for different position mounting.

Step 6. Installation Complete. (Figure 3)

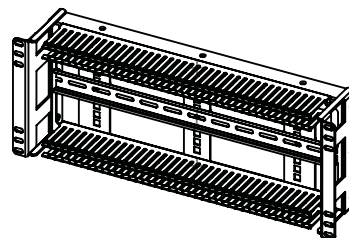


Figure 3

Figure 4